


# DABLIU

Suspension lamp in aluminum. Composed of a slender structure with three light points and diffusers that can be selected according to different versions. Spot version available for punctual lighting, version with spherical diffuser in opal blown glass and version with a metallic cone in burnished gold and black finish that allows more light diffusion. LED on board, dimmable.

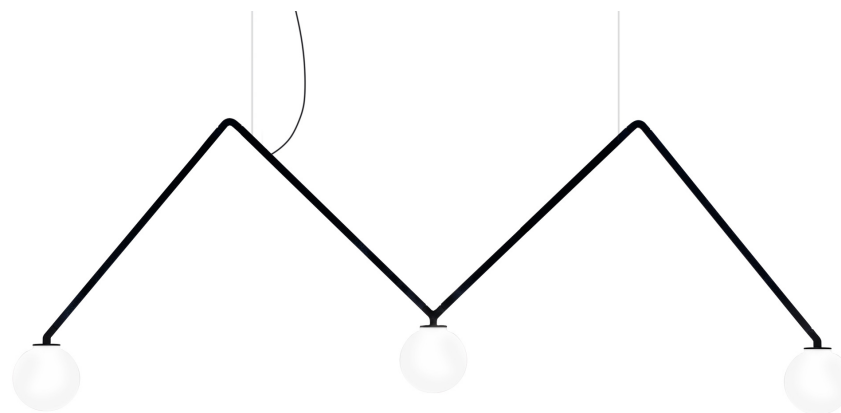

## SPOT 40° | 2700K

### LAMPING

Source	LED spot
Total power	3 x 5W
Emission	diffused downlight
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	3 x 400lm (source luminous flux)
Typ CRI	90
Energy class	A+
Materials	aluminum + PC + ABS
Notes	cable lenght 2m, led spot beam angle 40°
Net lamp weight	5 kg

### Codes

DAB LNN 51

### Structure/Diffuser


black/black

### PACKAGE

Package 01

Dimension: 15x80x150 cm / Gross weight: 2,5 kg

### Certificazioni

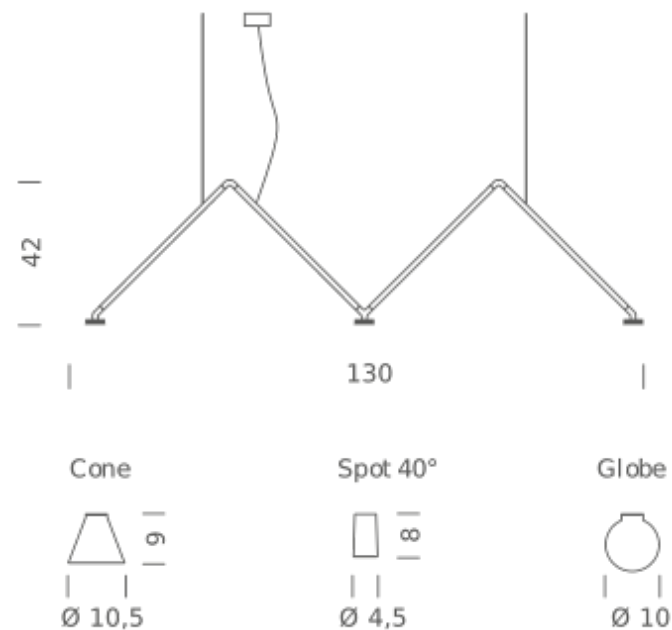

# SPOT 40° | 3000K

## LAMPING

Source	LED spot
Total power	3 x 5W
Emission	diffused downlight
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	3 x 400lm (source luminous flux)
Typ CRI	90
Energy class	A+
Materials	aluminum + PC + ABS
Notes	cable lenght 2m, led spot beam angle 40°


## Codes

DAB LNN 52

## Structure/Diffuser

black/black

## Certificazioni

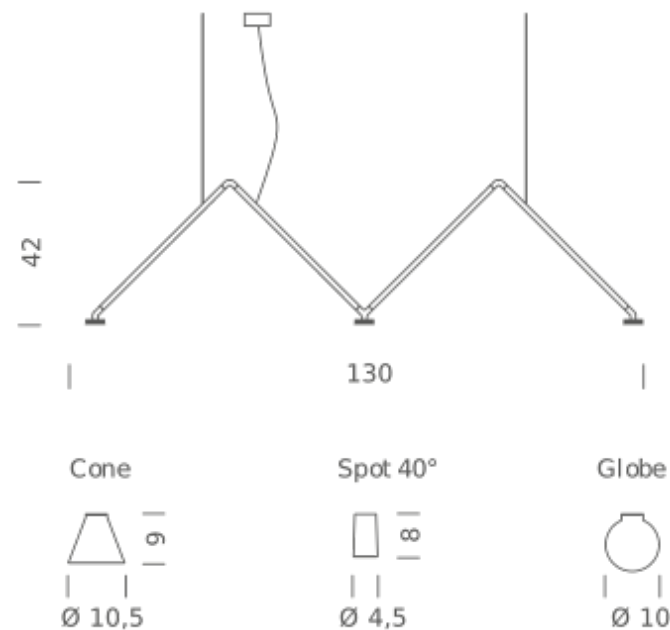

# GLOBE | 2700K

## LAMPING

Source	G4 LED
Total power	3 x 5W
Emission	diffused downlight
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	3 x 400lm (source luminous flux)
Typ CRI	90
Energy class	A+
Materials	aluminum + PC + ABS
Notes	cable lenght 2m, led spot beam angle 40°


## Codes

DAB LNN 53

## Structure/Diffuser

black/white

## Certificazioni

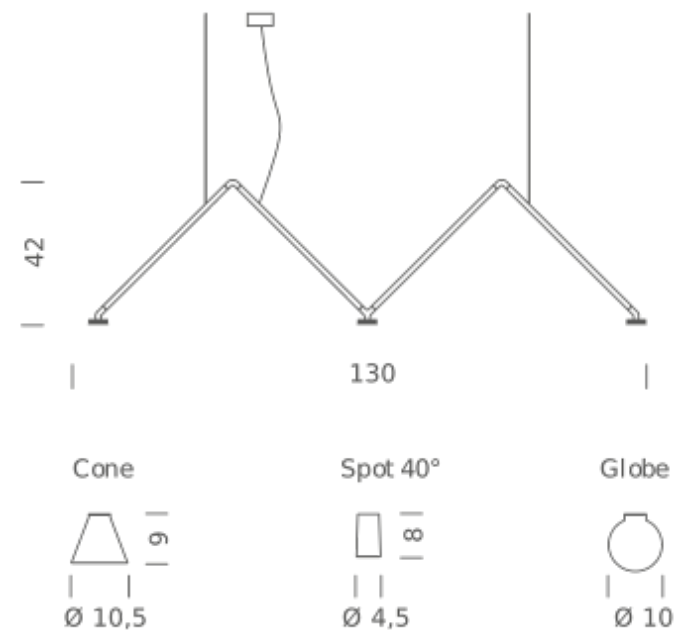

# GLOBE | 3000K

## LAMPING

Source	G4 LED
Total power	3 x 5W
Emission	diffused downlight
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	3 x 400lm (source luminous flux)
Typ CRI	90
Energy class	A+
Materials	aluminum + PC + ABS
Notes	cable lenght 2m, led spot beam angle 40°


## Codes

DAB LNN 54

## Structure/Diffuser

black/white

## Certificazioni

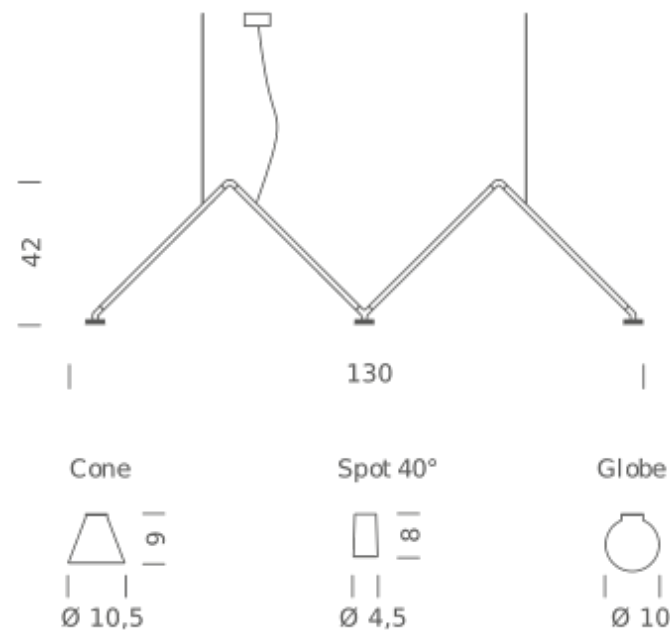

# CONE | 2700K

## LAMPING

Source	LED diffused
Total power	3 x 5W
Emission	indirect and diffused
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	3 x 400lm (source luminous flux)
Typ CRI	90
Energy class	A+
Materials	aluminum + PC + ABS + glass
Notes	cabale lenght 2m, led diffused


## Codes

DAB LNN 55

## Structure/Diffuser

black/gold burnished

## Certificazioni

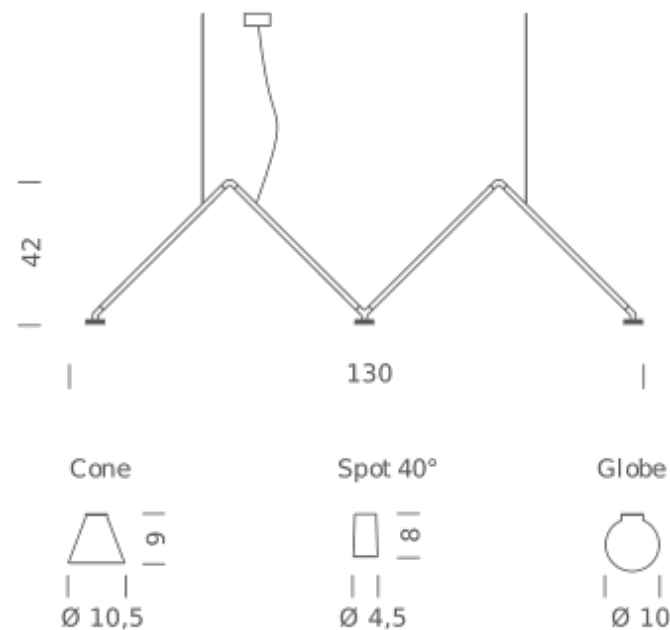

# CONE | 3000K

## LAMPING

Source	LED diffused
Total power	3 x 5W
Emission	indirect and diffused
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	3 x 400lm (source luminous flux)
Typ CRI	90
Energy class	A+
Materials	aluminum + PC + ABS + glass
Notes	cable lenght 2m, led diffused

## Codes

DAB LNN 56

## Structure/Diffuser

black/gold burnished

## Certificazioni

