




Table Lamps | 220-240 V
2 topLED 20 W DC - 24 W AC | CRI 90
9585

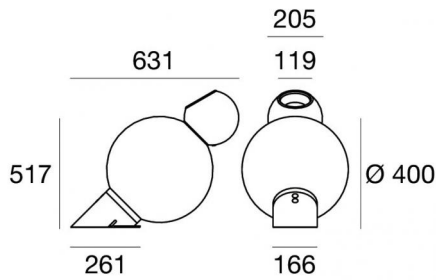

Technical data	
Construction year	2021
Type	Table Lamps
Installation position	Floor
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward and upward
Power	20 W
Source lumens	2290 lm
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP20
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	PUSH DIM
Directional	Swivelling
total angle (vertical plane)	360 °
total angle (horizontal plane)	360 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	2.5 m
Electric socket	Type F
Resin potting	No
Type of light emission	Double emission
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Material	Aluminium
Colour	Anodised Black
Processing	Anodisation

Finishing diffuser

Material	Glass
Colour	transparent

Finishing base

Material	Iron
Colour	black
Processing	Coating



Table Lamps | 220-240 V | 2 topLED 20 W DC - 24 W AC | CRI 90 | Base
9585

Double emission table lamps for indoor application. The warm white LED light source with a general lighting light distribution is composed of 2 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2290 lm, with a 114.5 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a anodised black finish, processed by means of anodisation; the diffuser is made of glass. The ingress protection degree is IP20;

The total absorbed power is 20 W. The power supply cable is included and features a 2.5 m lenght.

The device features protection class I and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features	
Light Output Ratio (LOR)	74 %
Source lumens	2290 lm
Delivered lumens	1711 lm
Consumption	24 W
Luminaire efficacy	71 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25
LED Life / Failure Ratio	
L70 B20 C0 72500h	

OPTICAL	
Light distribution simmetry	Symmetrical
C0/C180 optics	180°

